

D LUM GEN 3



**LUMENIA
INTERIOR**

D LUM GEN 3 luminaire is a stylish and powerful downlight, providing comfortable, quality illumination, with low UGR and easy installation. It is designed for public rooms and areas, stairways, corridors, foyers and shops.


	D LUM GEN 3		
Supply voltage	220-240 VAC		
System efficacy	100 lm/W	115 lm/W	120 lm/W
Power	12 W	20 W	33 W
Luminous flux	1200 lm	2310 lm	3900 lm
Weight	0.7 kg	1.1 kg	1.5 kg
Power factor	>0.9		
Lifetime L80B10	>50000 h		
CCT	4000K; other upon request		
CRI	80		
Ingress protection	IP 40		
Operating temperature	-20 C° to +35 C°		
Remote control options	DALI (optional)		
Colour (RAL)	RAL 9003		
Housing material	Aluminium		
Warranty	5 years		
Certificates	CE		




DIMENSIONS

Recessed mounting


Φ135 / 180 / 230mm

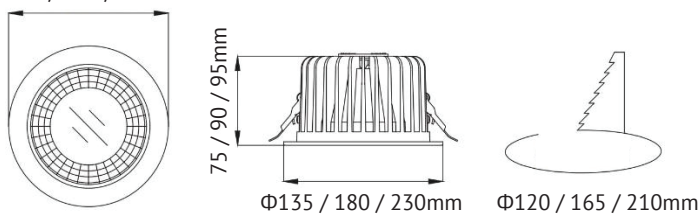

Surface mounting

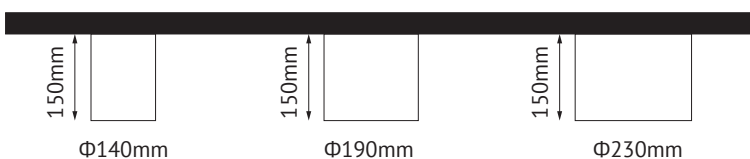

*Please refer to product installation manual for accurate installation instructions.

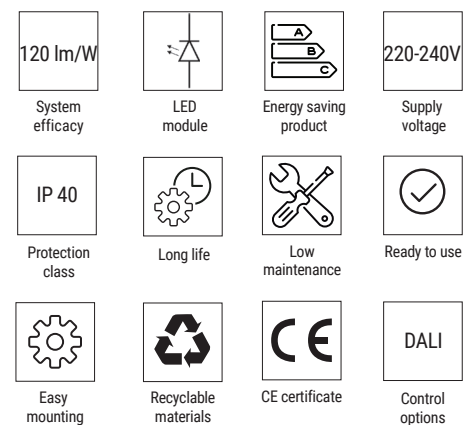


MAIN FEATURES

High pressure die cast aluminium housing
Easy to install
Low UGR
Recessed mounting

APPLICATIONS

Public rooms and areas
Stairways
Corridors
Foyers and shops

OPTIC

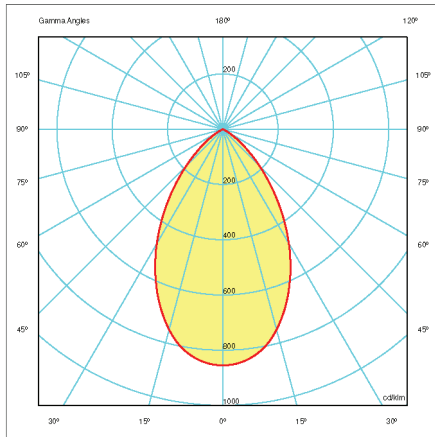

D LUM: Distribution of 80°

PRODUCT VARIATIONS

D LUM GEN 3

Article	Power [W]	Luminous flux [lm] *	Efficacy [lm/W]	Ingress protection
D LUM 15.4000.135.00.00	12	1200	100	40
D LUM 20.4000.180.00.00	20	2310	115	40
D LUM 35.4000.230.00.00	33	3900	120	40
D LUM 15.4000.135.10.00	12	1200	100	40
D LUM 20.4000.180.10.00	20	2310	115	40
D LUM 35.4000.230.10.00	33	3900	120	40
D LUM 15.4000.140.00.01	12	1200	100	40
D LUM 20.4000.190.00.01	20	2310	115	40
D LUM 35.4000.230.00.01	33	3900	120	40
D LUM 15.4000.140.10.01	12	1200	100	40
D LUM 20.4000.190.10.01	20	2310	115	40
D LUM 35.4000.230.10.01	33	3900	120	40

*Luminous flux is valid for CCT 4000 K

The latest validated data is available at www.lumenia.com.

LEGEND

	Abbreviation	Description
Luminaire	D LUM	D LUM GEN 3
Power	15, 20, 35	15 W, 20 W, 35 W
CCT	4000	4000 K
Diameter	135, 180, 230	Recessed: 135mm, 180mm, 230mm
	140, 190, 230	Surface: 140mm, 190mm, 230mm
Remote control options	00	/
	01	DALI
Type	00	Recessed
	01	Surface