


PRIROČNIK ZA NAMESTITEV / INSTRUCTION MANUAL


O LUM BACKLIT PANEL

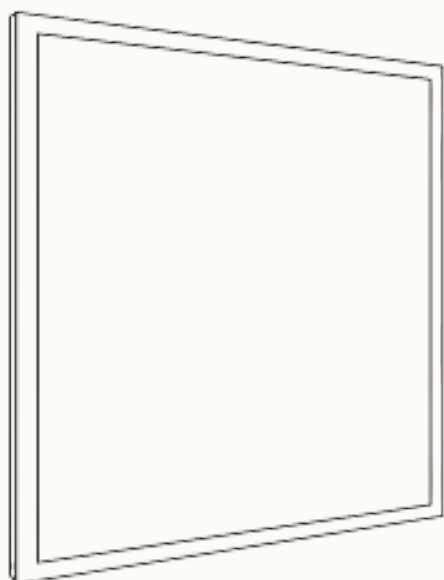

1. SPECIFIKACIJE / SPECIFICATION

MODEL	Moč / Power	Vhod / Input	Mere / Dimensions (mm)*	Teža / Weight (kg)	IP	T (°C)
O LUM BACKLIT PANEL	26	220-240 V - 50/60 Hz	595x595x25 295x1195x26	1.76/2.03	20	- 25 / + 40

* D x Š x V / L x W x H

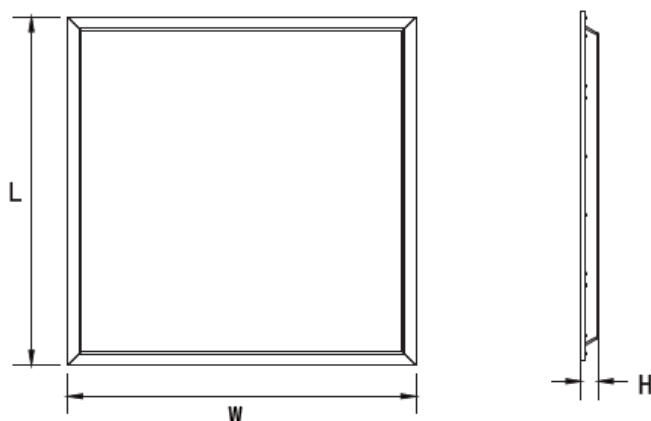


2. KORAKI NAMESTITVE / INSTALLATION


Pred montažo izklopite električno napajanje / Cut off power before installation.

OŽIČENJE / WIRING

Stikalni načrt / Panel connection diagram

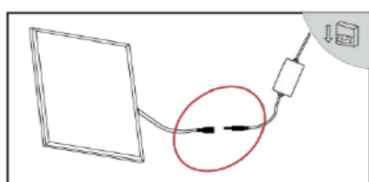

1. Priključite gonilnik na panel / Connect driver to the panel

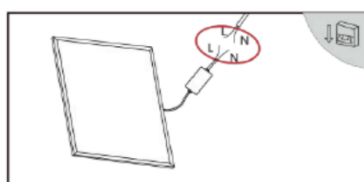


2. Nato priključite na električno omrežje (L-L; N-N) / The connect with city power (L-L; N-N)

Priključitev (povratna povezava lahko povzroči zakasnitev osvetlitve) / **Connection** (reversing connection may cause lighting delay)


MONTAŽA / INSTALLATION

VGRADNA MONTAŽA / RECESSED INSTALLATION

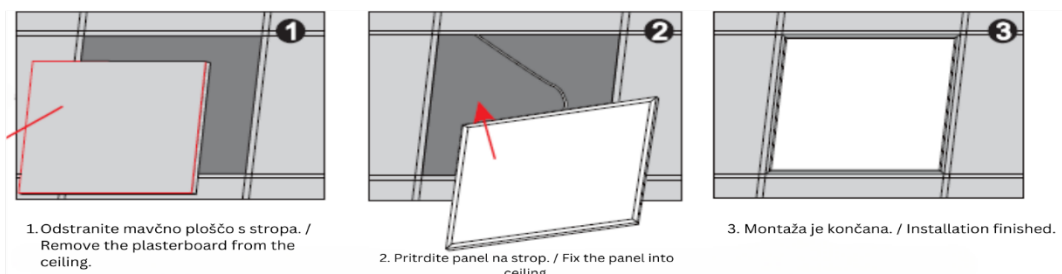


Stranke lahko uporabijo varnostno vrvico, da preprečijo padec luči zaradi negotovih dejavnikov (potresa itn.). / Customers can choose safety rope to avoid lamp falling caused by uncertain factors (earthquake, etc.)


Vgradni okvir MG-M002

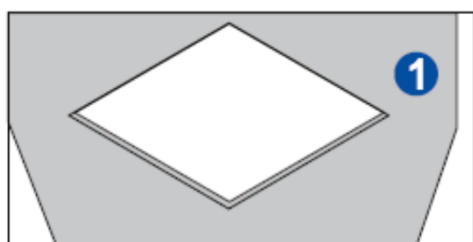


Izrežite luknjo v strop/Open a hole in the ceiling.

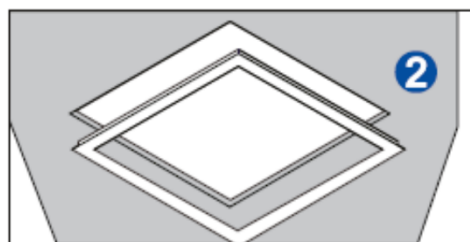

Okvir namestite v luknjo/ Fix the frame to the hole.

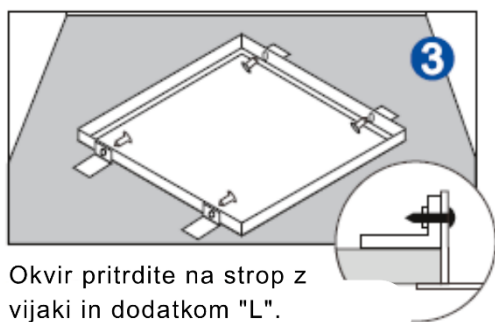


Okvir pritrdite na strop z vijaki in dodatkom "L".
/ Fix the frame to the ceiling with the screws and "L" accessory.

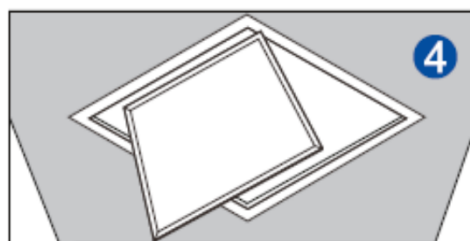


Vstavite panel v okvir.
/ Put the panel into the frame.

VIŠEČA MONTAŽA / SUSPENSION INSTALLATION MG-D001

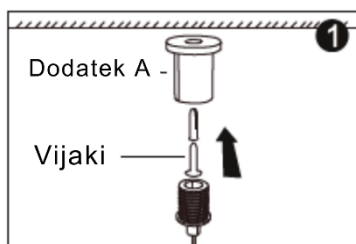

Pritrdite dodatek A v strop/
Fix the accessory A in the
ceiling

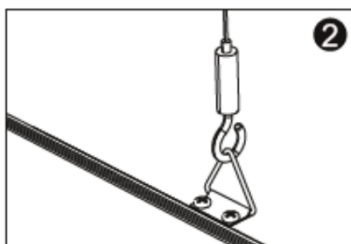


Pritrdite kavelj za obešanje na
vse štiri vogale/ Fix hook on 4
corners for suspension




Končna namestitvev/ Finished
installation


NADOMETNA MONTAŽA / SURFACE MOUNTED (surface mounted frame MG-M005 / okvir za nadometno montažo MG-M005)

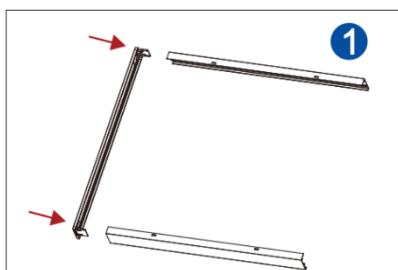


Sestavite 3 kose okvirja s kovinskim nosilcem.
/Assemble the 3 pieces of frame by metal
bracket.

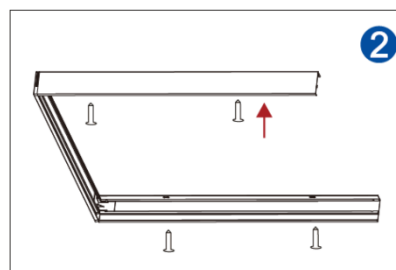

Kvadratne okvirje pritrdite na strop z
vijaki /Fix the square frames into
ceiling with screws.

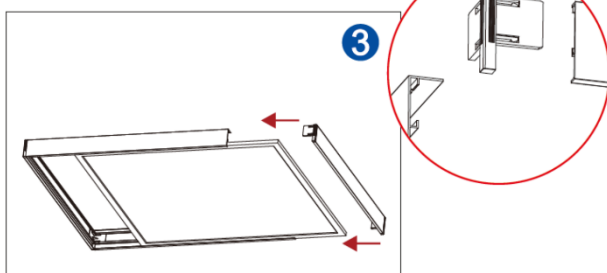

Vstavite ploščo v okvirje in pritrdite okvir pokrivne
plošče./Insert the panel into frames and fix the cover
plate frame.

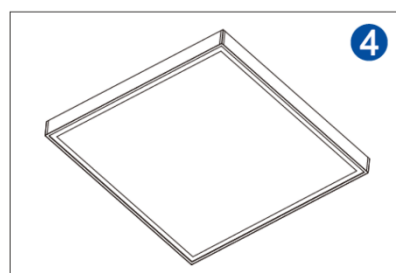

Končna inštalacija/ Finished
frame installation.

Svetilo lahko popravlja ali vzdržuje le proizvajalec ali njegov servisni zastopnik ali usposobljen električar. / The luminaire should only be repaired or maintained by the manufacturer or his service agent or a qualified electrician.



Previdno, nevarnost električnega udara. / Caution, risk of electric shock.



Ta oznaka označuje, da tega izdelka ni dovoljeno odstranjevati z drugimi gospodinjskimi odpadki v EU. Da bi preprečili morebitno škodo za okolje ali zdravje ljudi zaradi nenadzorovanega odlaganja odpadkov, jih odgovorno reciklirajte in tako prispevajte k trajnostni ponovni uporabi materialnih virov. Če želite vrniti uporabljeno napravo, se obrnite na prodajalca, pri katerem ste izdelek kupili. Ta izdelek lahko prevzame za recikliranje, namenjeno varstvu okolja. / This marking indicates that this product should not be disposed with other household wastes through the EU. To prevent possible harm to the environment or human health from the uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Opozorilo / warning:

1. Če je zunanji gibljivi kabel ali vrvica te svetilke poškodovana, jo mora zamenjati izključno proizvajalec ali njegov servisni zastopnik ali ustrezno usposobljena oseba, da se prepreči tveganje. / If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
2. Svetlobni vir v tem svetilu sme zamenjati zgolj proizvajalec, njegov zastopnik ali druga kvalificirana oseba. / The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.